



(An ISO 9001:2008 Mfg. Co.)

TPI with
BCD / Gray Code Input
EE-607 / EE-601G

INSTRUCTION MANUAL

Instruction Manual
for
TPI with
BCD / Gray Code Input
EE-607 / EE-601G

EMCO ELECTRONICS


Head Office : 302, Vasan Udyog Bhavan, Senapati Bapat Marg, Lower Parel (W), Mumbai – 13.
Tel.: +91-22-2492 3183 / 2490 2283 ■ Fax : +91-22-2495 1024
E-mail : office@emcoelectronics.org

Factory : Unit No. 13, Kedarnath, Tungareshwar Indl. Complex No. 1, Sativali, Vasai (E),
Dist - Thane. 401 208. ■ Tel. : +91-250-2481 783 / 804 ■ Fax : +91-250-2481 087
E-mail : mumbai@emcoelectronics.org

South Office : 15, Wood Street, 1st floor, Richmond Road, Bangalore – 560 025.
Tel.: +91-80-2557 0215 ■ Tel.Fax : +91-80-2556 6606
E-mail : emcoblr@bgl.vsnl.net.in

www.emcoelectronics.org

EMCO's Tap Position Indicator Type EE-607 / EE-601G is used to indicate the tap position of the Power Transformer. Resistors are connected between each tap on the tap-changer. The connections from the minimum, maximum and wiper positions coming from the tap-changer are connected to the BCD / Gray Code Encoder. Encoder encodes the Tap no. into respective code. This encoded code is fed as input to the TPI along with Ground as Common as marked on the rear panel A1 (LSB) to A5 (MSB for Gray code type) or A6 (MSB for BCD Code type). These inputs are buffered and fed to the microcontroller. Microcontroller outputs the data to display the actual Tap no.

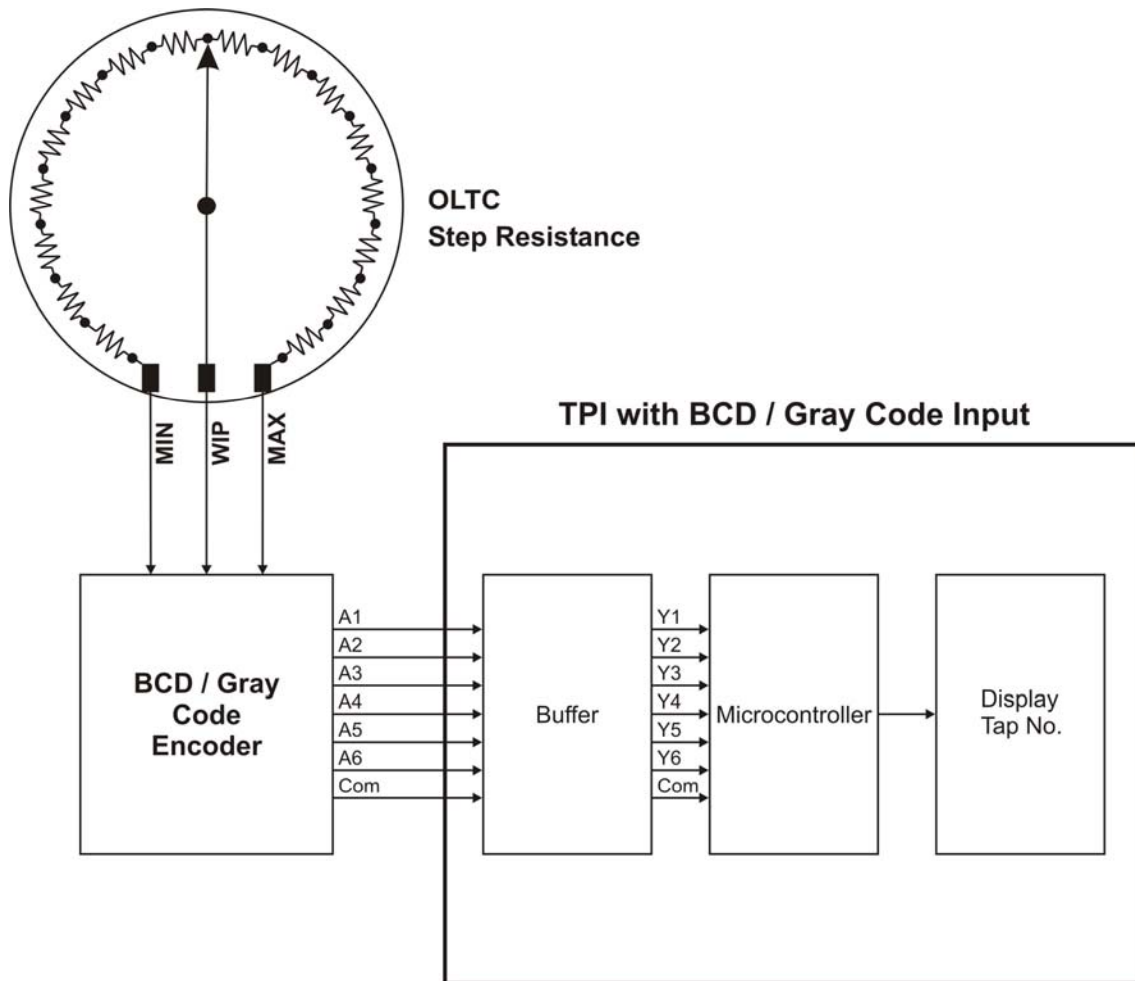

Block diagram of TPI with BCD / Gray Code Input

AC Power (95-260 V AC/DC (UPS)) is also connected to the terminals marked on the Rear Panel.

When the unit is powered on, the display indicates the current position of the Tap-changer. As the tap is increased, the display increases and as the tap is decreased the display decreases. Check the TPI by changing the tap from position 1 (min) to the max. Position and confirm that it reads correctly.



TPI : model – EE-607




TPI : model – EE-601G

Specifications :

Max. No. of tap positions	: 33 for BCD Code (EE-607) 21 for Gray Code (EE-601G)
Input Lines	: 6 + 1 common for BCD Code (EE-607) 5 + 1 common for Gray Code (EE-601G)
Display	: 7 segment LED
Supply Voltage	: 95 to 260 V AC/DC
Panel Cutout Dimensions	: 90 x 48 mm (W x H)
Depth	: 110 mm
Operating temperature	: 0 - 45° C
Weight	: 0.5 Kg. approx.

Connection diagram for various types of TPI

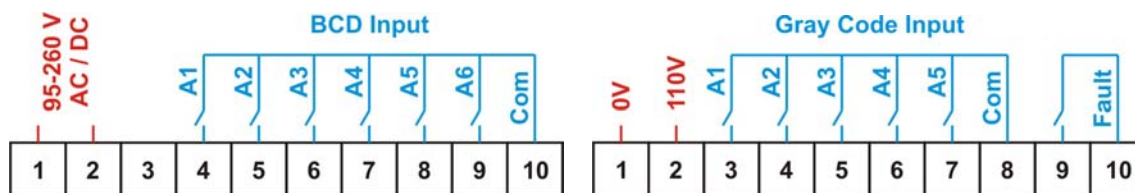

TPI with BCD Input Connections

TPI with Gray Code Input Connections

WARRANTY

This product from EMCO ELECTRONICS is warranted against defects in materials and workmanship for a period of 12 months from the date of dispatch to the first buyer/purchaser of this equipment, this being essentially limited by warranties given to EMCO ELECTRONICS on the component used in equipment.

During the warranty period, EMCO ELECTRONICS will at its option, either repair or replace the product which proves to be defective provided the product has been used with reasonable care and in accordance with the manuals/product specification. Consequently this warranty shall also not apply to defects/damages in transit or resulting from misbehaving, misuse, unauthorized modifications or repairs operations outside the environmental, electrical and/or other specification, improper or inadequate maintenance of the product, or site conditions as required/recommended and damages arising from accidental or abnormal causes.

The warranty period for items repaired/replaced shall not exceed the period for which the equipment was originally warranted and also the liability of EMCO ELECTRONICS to the purchaser shall not in any case, exceed the original purchase price of the equipment.

For warranty service or repair, the equipment must be returned to EMCO ELECTRONICS securely packed on Freight paid basis and accompanied by a certificate stating that the equipment is being returned for warranty repairs along with details of the purchase (Purchaser's Name, and address, Invoice No. and Date of purchase) and details of the equipment failure, faults conditions, other useful information to facilitate early repair/rectification of the equipment.

Return of the equipment duly repaired can be arranged on payment of the packing and forwarding charges together with any other taxes, duties, other miscellaneous expense incurred. Alternatively the purchaser may arrange to collect the equipment from EMCO ELECTRONICS. In case the repairs are not covered under warranty, the charges for the same must also be paid before collection of the equipment.

Our engineer's services are available at site for instruments during warranty or out of warranty period, on chargeable basis, details of which are available on request.

In the interest of development and improvement, EMCO Electronics reserves the right to amend without notice, details contained in this publication. No legal liabilities will be accepted by EMCO Electronics for any errors, omissions or amendments.